





## Precistar 5 x D Solid Carbide Extreme Performance Twist Drill.

**Type:** N, right hand cutting, straight shank according to DIN 6535

**Design Features:** 5 x D, helix angle 30°, Point angle 140°, DIN6537K,

Available in facet point and with and without thru coolant

**Application:** Multipurpose drill for cutting carbon and alloy steels, Stainless steel, Cast Iron, difficult to cut materials, general Steel, Cast Steel, Soft Structural Steel, Tool Steel, High-alloy Steel & High Temperature Alloys, Cast Materials, Titanium Alloys,

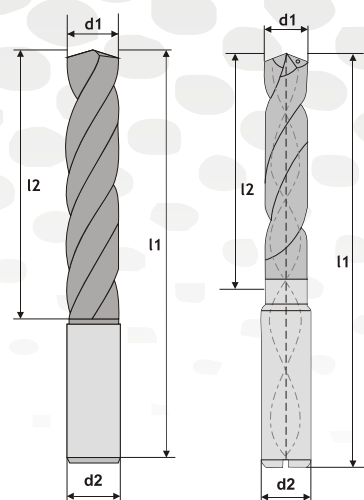

### Precistar Extreme Performance Twist Drill 5 x D

Article No.	Dimension (mm)					TiAlN Coated
	Ø d1	Ø d2	l3	l2	l1	
2 Flute	h7	h6				
PS-D5-2030	3,0	6,0	14	20	62	■
PS-D5-2031	3,1	6,0	14	20	62	■
PS-D5-2032	3,2	6,0	14	20	62	■
PS-D5-2033	3,3	6,0	14	20	62	■
PS-D5-2034	3,4	6,0	14	20	62	■
PS-D5-2035	3,5	6,0	14	20	62	■
PS-D5-2036	3,6	6,0	14	20	62	■
PS-D5-2037	3,7	6,0	14	20	62	■
PS-D5-2038	3,8	6,0	17	24	66	■
PS-D5-2039	3,9	6,0	17	24	66	■
PS-D5-2040	4,0	6,0	17	24	66	■
PS-D5-2041	4,1	6,0	17	24	66	■
PS-D5-2042	4,2	6,0	17	24	66	■
PS-D5-2043	4,3	6,0	17	24	66	■
PS-D5-2044	4,4	6,0	17	24	66	■
PS-D5-2045	4,5	6,0	17	24	66	■
PS-D5-2046	4,6	6,0	17	24	66	■
PS-D5-2047	4,7	6,0	17	24	66	■
PS-D5-2048	4,8	6,0	20	28	66	■
PS-D5-2049	4,9	6,0	35	44	82	■
PS-D5-2050	5,0	6,0	35	44	82	■
PS-D5-2051	5,1	6,0	35	44	82	■
PS-D5-2052	5,2	6,0	35	44	82	■
PS-D5-2053	5,3	6,0	35	44	82	■
PS-D5-2054	5,4	6,0	35	44	82	■
PS-D5-2055	5,5	6,0	35	44	82	■
PS-D5-2056	5,6	6,0	35	44	82	■
PS-D5-2057	5,7	6,0	35	44	82	■
PS-D5-2058	5,8	6,0	35	44	82	■
PS-D5-2059	5,9	6,0	35	44	82	■
PS-D5-2060	6,0	6,0	35	44	82	■

### Precistar Extreme Performance Twist Drill 5 x D

Article No.	Dimension (mm)					TiAlN Coated
	2 Flute	Ø d1	Ø d2	l3	l2	
	h7	h6				
PS-D5-2061	6,1	8,0	43	53	91	■
PS-D5-2062	6,2	8,0	43	53	91	■
PS-D5-2063	6,3	8,0	43	53	91	■
PS-D5-2064	6,4	8,0	43	53	91	■
PS-D5-2065	6,5	8,0	43	53	91	■
PS-D5-2066	6,6	8,0	43	53	91	■
PS-D5-2067	6,7	8,0	43	53	91	■
PS-D5-2068	6,8	8,0	43	53	91	■
PS-D5-2069	6,9	8,0	43	53	91	■
PS-D5-2070	7,0	8,0	43	53	91	■
PS-D5-2071	7,1	8,0	43	53	91	■
PS-D5-2072	7,2	8,0	43	53	91	■
PS-D5-2073	7,3	8,0	43	53	91	■
PS-D5-2074	7,4	8,0	43	53	91	■
PS-D5-2075	7,5	8,0	43	53	91	■
PS-D5-2076	7,6	8,0	43	53	91	■
PS-D5-2077	7,7	8,0	43	53	91	■
PS-D5-2078	7,8	8,0	43	53	91	■
PS-D5-2079	7,9	8,0	43	53	91	■
PS-D5-2080	8,0	8,0	43	53	91	■
PS-D5-2081	8,1	10,0	49	61	103	■
PS-D5-2082	8,2	10,0	49	61	103	■
PS-D5-2083	8,3	10,0	49	61	103	■
PS-D5-2084	8,4	10,0	49	61	103	■
PS-D5-2085	8,5	10,0	49	61	103	■
PS-D5-2086	8,6	10,0	49	61	103	■
PS-D5-2087	8,7	10,0	49	61	103	■
PS-D5-2088	8,8	10,0	49	61	103	■
PS-D5-2089	8,9	10,0	49	61	103	■
PS-D5-2090	9,0	10,0	49	61	103	■
PS-D5-2091	9,1	10,0	49	61	103	■
PS-D5-2092	9,2	10,0	49	61	103	■
PS-D5-2093	9,3	10,0	49	61	103	■
PS-D5-2094	9,4	10,0	49	61	103	■
PS-D5-2095	9,5	10,0	49	61	103	■
PS-D5-2096	9,6	10,0	49	61	103	■
PS-D5-2097	9,7	10,0	49	61	103	■
PS-D5-2098	9,8	10,0	49	61	103	■
PS-D5-2099	9,9	10,0	49	61	103	■
PS-D5-2100	10,0	10,0	49	61	103	■
PS-D5-2101	10,1	12,0	56	71	118	■
PS-D5-2102	10,2	12,0	56	71	118	■
PS-D5-2103	10,3	12,0	56	71	118	■
PS-D5-2104	10,4	12,0	56	71	118	■
PS-D5-2105	10,5	12,0	56	71	118	■
PS-D5-2106	10,6	12,0	56	71	118	■
PS-D5-2107	10,7	12,0	56	71	118	■
PS-D5-2108	10,8	12,0	56	71	118	■
PS-D5-2109	10,9	12,0	56	71	118	■

### Precistar Extreme Performance Twist Drill 5 x D

Article No.	Dimension (mm)					TiAlN Coated	
	2 Flute	Ø d1 h7	Ø d2 h6	l3	l2		l1
PS-D5-2110		11,0	12,0	56	71	118	■
PS-D5-2112		11,2	12,0	56	71	118	■
PS-D5-2115		11,5	12,0	56	71	118	■
PS-D5-2118		11,8	12,0	56	71	118	■
PS-D5-2120		12,0	12,0	56	71	118	■
PS-D5-2122		12,2	14,0	60	77	124	■
PS-D5-2125		12,5	14,0	60	77	124	■
PS-D5-2128		12,8	14,0	60	77	124	■
PS-D5-2130		13,0	14,0	60	77	124	■
PS-D5-2135		13,5	14,0	60	77	124	■
PS-D5-2138		13,8	14,0	60	77	124	■
PS-D5-2140		14,0	14,0	60	77	124	■
PS-D5-2145		14,5	16,0	63	83	133	■
PS-D5-2150		15,0	16,0	63	83	133	■
PS-D5-2155		15,5	16,0	63	83	133	■
PS-D5-2160		16,0	16,0	63	83	133	■
PS-D5-2165		16,5	18,0	71	93	143	■
PS-D5-2170		17,0	18,0	71	93	143	■
PS-D5-2175		17,5	18,0	71	93	143	■
PS-D5-2180		18,0	18,0	71	93	143	■
PS-D5-2185		18,5	20,0	77	101	153	■
PS-D5-2190		19,0	20,0	77	101	153	■
PS-D5-2195		19,5	20,0	77	101	153	■
PS-D5-2200		20,0	20,0	77	101	153	■